

Model: SCT16080QT

Characteristic:

Rectangle hole, Crimping terminal output,
Hanging installation and Sub-plate mounting.

Technical indicators:


Material of core: Silicon steel sheet
Fire resistance property: UL94-V0
Work voltage: 720V
Work temperature: $-25^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Storage temperature: $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$
Frequency range: 50Hz~60Hz
Dielectric strength: AC 3.5KV/1min




Electric parameter:

Output (A)	input/Output	Accuracy/Load (VA)		
		0.5	1	3
1A	1000/1	5	10	15
	1500/1	7.5	10	15
	2000/1	7.5	15	20
	2500/1	7.5	15	25
	3000/1	10	20	25
	3500/1	10	20	30
	4000/1	10	25	30
5A	1000/5	5	7.5	
	1500/5	7.5	10	
	2000/5	10	15	
	2500/5	10	15	
	3000/5	15	20	
	3500/5	15	20	
	4000/5	20	25	


Wiring diagram:

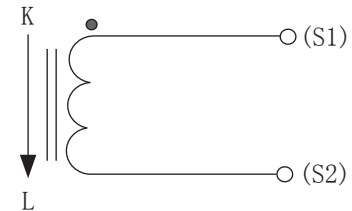


Outline size diagram(in mm):

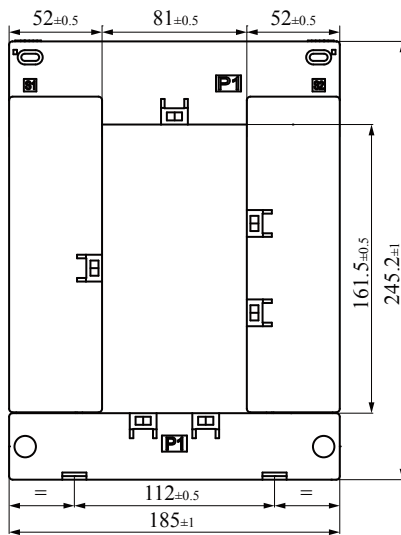

Front view

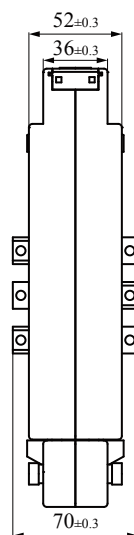

Side view

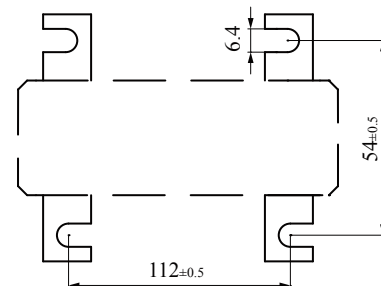

Sub-plate mount feet size