

Model: SCT12080QT

Characteristic:


Rectangle hole, Crimping terminal output,
Hanging installation and Sub-plate mounting.

Technical indicators:


Material of core: Silicon steel sheet
Fire resistance property: UL94-V0
Work voltage: 720V
Work temperature: -25°C ~ +60°C
Storage temperature: -30°C ~ +90°C
Frequency range: 50Hz ~ 60Hz
Dielectric strength: AC 3.5KV/1min

Electric parameter:


Output (A)	input/Output	Accuracy/Load (VA)		
		0.5	1	3
1A	500/1	2.5	3.75	5
	600/1	2.5	3.75	5
	800/1	2.5	5	7.5
	1000/1	5	7.5	10
	1500/1	7.5	10	15
	2000/1	7.5	10	15
5A	500/5	2.5	5	--
	600/5	2.5	5	--
	800/5	2.5	5	--
	1000/5	5	10	--
	1500/5	7.5	10	--
	2000/5	7.5	10	--

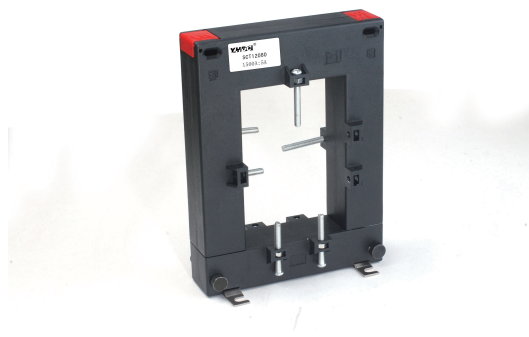


Characteristic curve in different load volt-ampere:

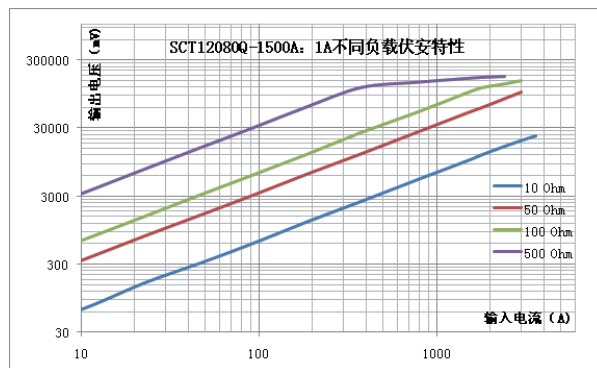


Wiring diagram:




Outline size diagram(in mm):

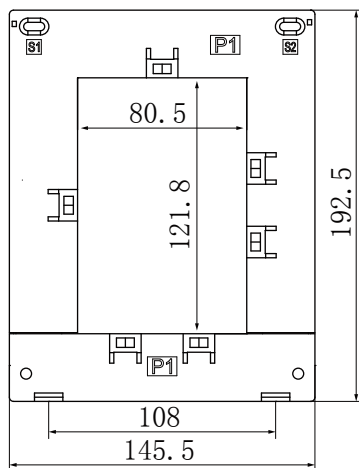

Front view



Side view

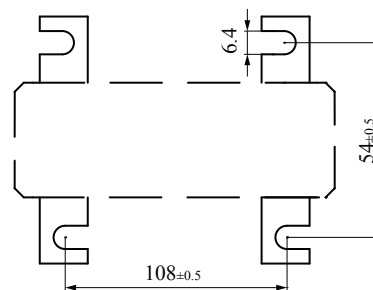

Sub-plate mount feet size