

## Model: SCT6040QT

### Characteristic:

Rectangle hole, Crimping terminal output,  
Hanging installation and Sub-plate mounting.

### Technical indicators:


Material of core: Silicon steel sheet  
Fire resistance property: UL94-V0  
Work voltage: 720V  
Work temperature: -25°C ~ +60°C  
Storage temperature: -30°C ~ +90°C  
Frequency range: 50Hz ~ 60Hz  
Dielectric strength: AC 3.5KV/1min

### Electric parameter:


Output (A)	input/Output	Accuracy/Load (VA)		
		0.5	1	3
1A	250/1	1.5	2.5	3.75
	600/1	3.75	7.5	10
	1000/1	5	10	15
	1500/1	7.5	10	20
	2000/1	10	15	25
5A	250/5	1.5	2.5	--
	600/5	5	7.5	--
	1000/5	7.5	10	--
	1500/5	10	15	--
	2000/5	15	20	--




### Wiring diagram:




### Outline size diagram(in mm):

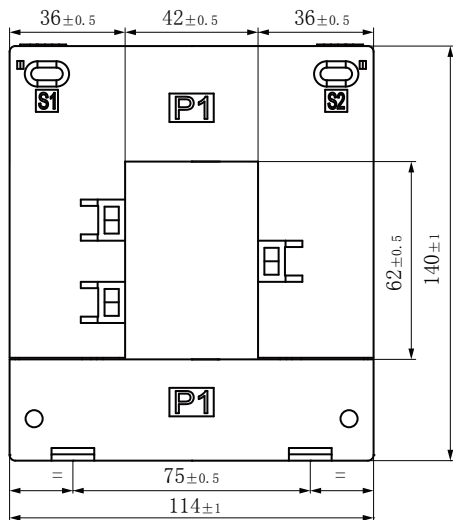

Front view

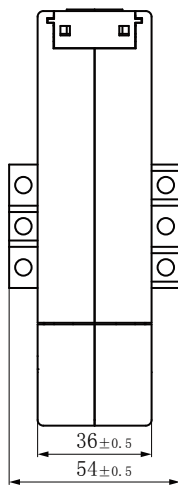

Side view

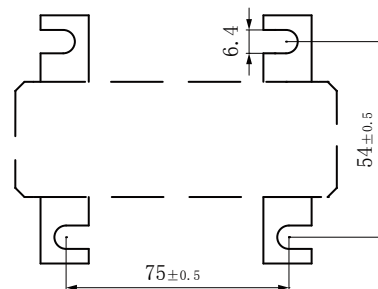

Sub-plate mount feet size