


Model:TA16E-03

Characteristics:

primary coil built-in, PCB welding, Epoxy resin encapsulated, permalloy core.

Technical index:


- Mounting type: PCB
- Material of the core: Permalloy
- Flame resistance: UL94-V0
- Execution standard: GB1208-2006
- Operating temperature: -35℃~+85℃
- Storage temperature: -45℃~+95℃
- Frequency range: 20Hz-20KHz
- Dielectric strength: 3KV 50Hz 1min

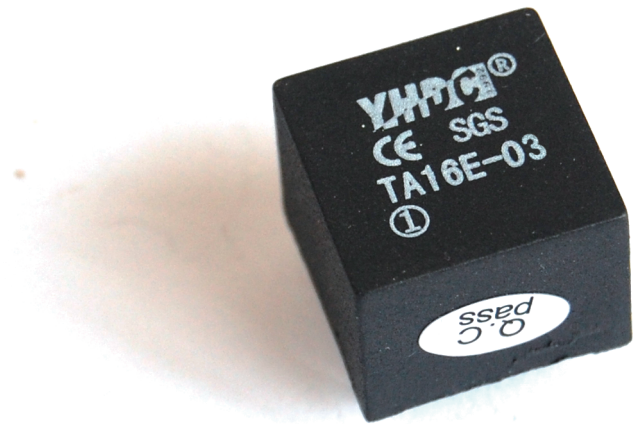


Electrical parameters:

Rated input	0-0.1	A
Max.input		A
Rated output	0-2.5	mA
Turns ratio	20: 800	
Accuracy	±1	%
Linearity	≤0.1	%
Phase difference	≤10'	
max: Max. sampling resistance	300	Ω
Weight	13	g


Schematic diagram:

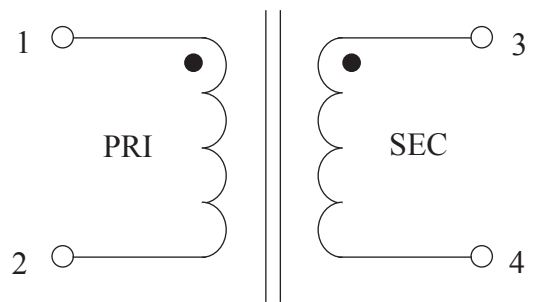

Dimensions (in mm) :

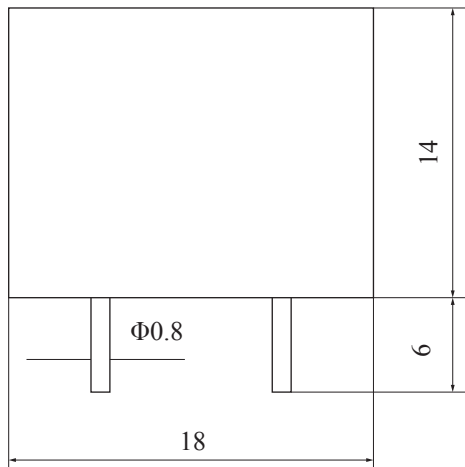

Front view

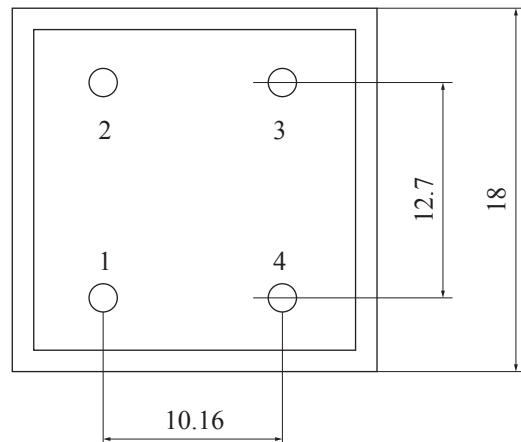

Bottom view