

Model: SCT016TS

Characteristic:

Hanging installation, Crimping terminal output.

Technical indicators:

Hanging installation, Crimping terminal output

Material of core: Silicon steel sheet

Work voltage:720V

Work temperature:-25℃~+60℃

Storage temperature:-30℃~+90℃

Frequency range:50Hz~60Hz


Dielectric strength:3.5KV 50Hz 1min

Electric parameter:


Rated input(rms)	150	A
Max. Input	200	A
Rated output	50	mA
Turns ratio	1: 3000	
Accuracy	0.5/1	%
Linearity	≤0.2	%
Phase error	+1 ± 1°	
max.Sampling resistance	10	Ω
Weight	85	g



Characteristic curve in different load volt-ampere:

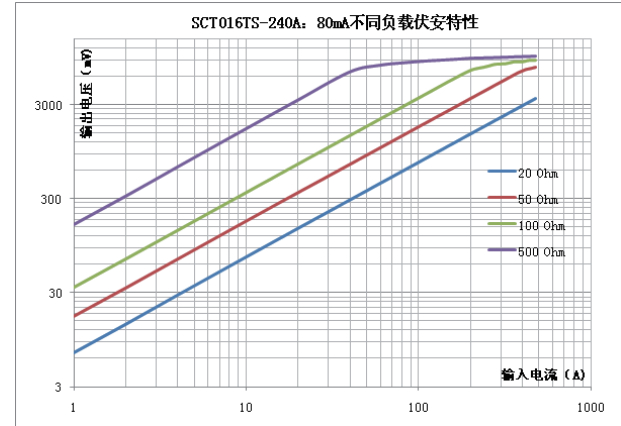

Wiring diagram:

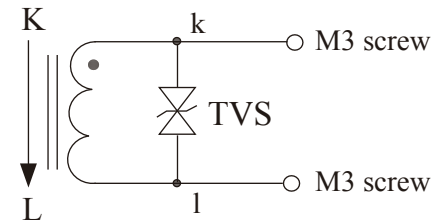

TVS: Transient voltage suppressor, Current output type

Outline size diagram(in mm):

