

Model:TA17-03

Characteristics:

Both PCB welding and leading wire output mode are available. Fully enclosed, Nanocrystalline core.

Technical index:

Mounting type: PCB

Material of the core: Nanocrystalline

Flame resistance: UL94-V0

Execution standard: GB1208-2006

Operating temperature: -35℃~+85℃

Storage temperature: -45℃~+95℃

Frequency range: 20Hz-20KHz


Dielectric strength: $\geq 3.5\text{KV}$ 50Hz 1min




Electrical parameters:

Rated input	0-10	A
Max.input	22	A
Rated output	0-10	mA
Turns ratio	1: 1000	
Accuracy	± 1	%
Linearity	≤ 0.2	%
Phase difference	$\leq 25'$	
max: Max. sampling resistance	50	Ω
Weight	19.1	g


Schematic diagram:



Dimensions (in mm) :

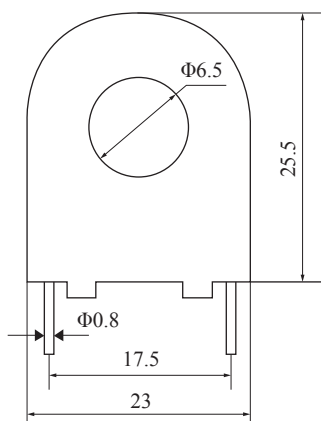

Front view

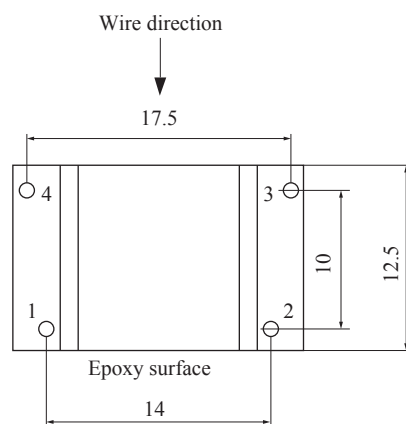

Bottom view