

Model : SCT019

Characteristic:

Opening size 19mmx19mm, Compatible to foreign products,
Epoxy encapsulated, leading wire output (1m)。




Technical indicators:

Material of core: permalloy
Fire resistance property:UL94-V0
Work voltage:660V
Work temperature:-25℃~+70℃
Storage temperature:-40℃~+85℃
Frequency range:20Hz~1KHz
Dielectric strength: 3.5KV 50Hz 1min


Electric parameter:

Rated input(rms)	200	A
Max. Input	300	A
Rated output	0.333	V
Turns ratio		
Accuracy	±0.5	%
Linearity	≤0.2	%
Phase error		
max.Sampling resistance	20	Ω
Weight	91	g

Characteristic curve in different load volt-ampere:

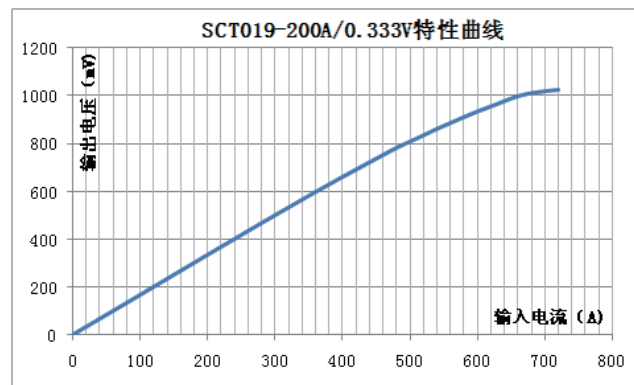


Wiring diagram:

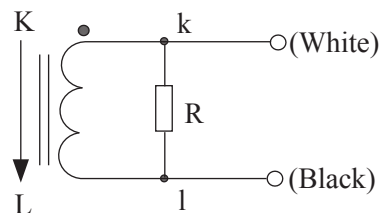


Built-in with sampling resistance, voltage output type

Outline size diagram(in mm):

Core opening and closing way: pull plug type

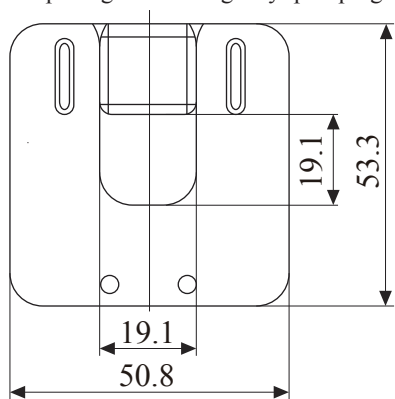

Front view

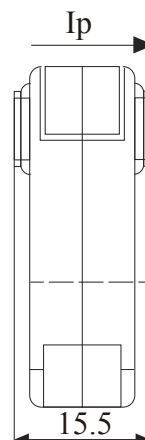

Side view