

Model:PE3018-M

Characteristics:

Vacuum Epoxy Encapsulated,PCB mounting,Primary voltage:
110V/220V/230V,or producing as customerized.

Technical Index:

Technical Index: PCB

Flame resistance : UL94-V0

Insulation class: B

Operation temperature: -30℃~+70℃

Work frequency: 50Hz~60Hz

Dielectric strength: 3.75KV 50Hz 1min





Technical Parameters table:

Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤25	%
Power	2	VA
Temperature rising	≤16	℃
No load loss	≤0.5	W
weight	90	g


Secondary voltage		Secondary no load voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V×2	8V	8V×2	333mA	166mA×2
7.5V	7.5V×2	10V	10V×2	266mA	133mA×2
9V	9V×2	12V	12V×2	222mA	111mA×2
12V	12V×2	16V	16V×2	166mA	83mA×2
15V	15V×2	20V	20V×2	133mA	66.5mA×2
18V	18V×2	24V	24V×2	111mA	55.5mA×2
24V	24V×2	32V	32V×2	83mA	41.5mA×2

Dimension (in mm) :

Schematic Diagram:

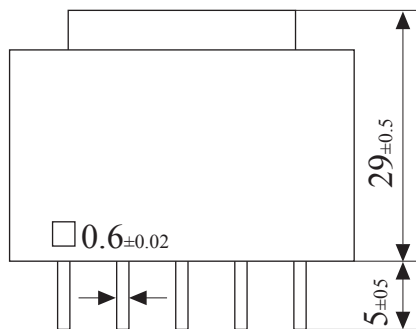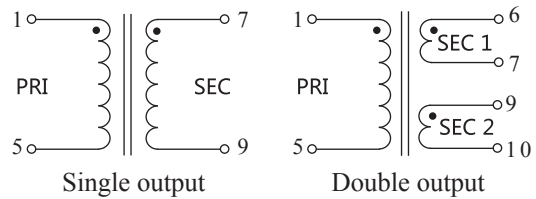

Front View

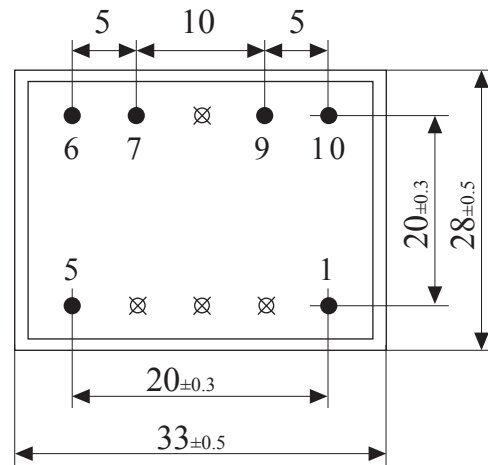

Bottom View