

Model:PU4820B

Characteristics:

PCB mounting, low mounting height, Input: double
110V/double 115V(or producing as customerized).



Technical Index:


Mounting type: PCB
Flame resistance : UL94-V0
Isulation class: B
Operation temperature: -30°C ~ +40°C
Work frequency: 50Hz~60Hz
Dielectric strength: 4KV 50Hz 1min

Technical Parameters table:

Primary voltage	110×2/115×2	V
Pirmary voltage range	±10	%
Voltage regulation	≤13	%
Power	40	VA
Temperature rising	≤25	°C
No load loss	≤2	W
weight	750	g

Secondary voltage	Secondary no load voltage	Secondary full load current
6V×2	7.3V×2	3.33A×2
7.5V×2	8.6V×2	2.67A×2
9V×2	10.8V×2	2.22A×2
12V×2	14.3V×2	1.67A×2
15V×2	17.7V×2	1.33A×2
18V×2	21.7V×2	1.11A×2
24V×2	27.5V×2	0.83A×2

Schematic Diagram:

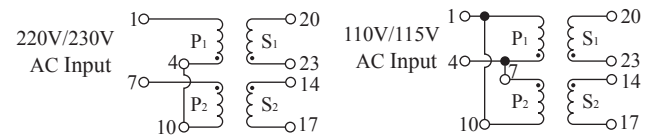

Dimension (in mm) :

