


Model:KMB419-201S

characteristics:

Electrical parameters are same with foreign similar products.
Applicable for triggering of pulse string SCR below 1000A.

Technical indicators:


Installation method: PCB
Flame resistance: UL94-V0
Operating temperature: $-20^{\circ}\text{C} \sim +50^{\circ}\text{C}$
Storage temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Frequency range: 1KHz \sim 50KHz
Dielectric strength: 5KV 50Hz 1min

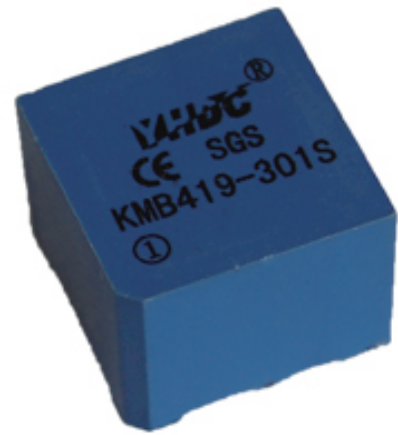

Electrical parameters:

Vout microsecond integral	1500	μVs
Pulse width (D=1:2)	100	μs
Ratio	2 : 1	
Input amplitude	15	V
Output amplitude	≥ 5	V
Load impedance	7	Ω
Leading edge time	≤ 5	μs
Main circuit operating voltage	660	V
Weight	20	g

Connection diagram:

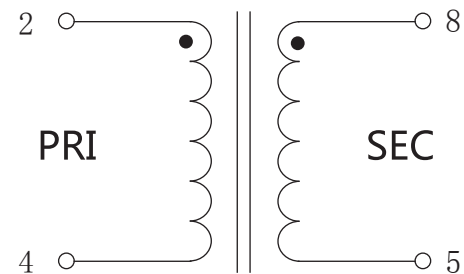

Dimensions (in mm) :

