


Model:PTC25

Characteristics:

Small leakage,Low noise,High efficiency,Low no load current,PCB mounting,Used for supper acoustics,Medical equipment,Military engineering,Precision instrument,using the imported high quality toroidal core Primary working voltage:110×2/115×2/120×2/(Can be customized according to customer's requirements)

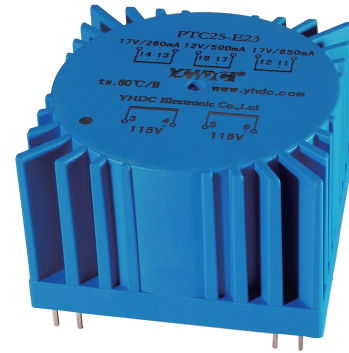

Technical index:


Mounting type:PCB
 Flame resistance:UL94-V0
 Insulation class:B grade
 Work temperature:-30℃~+60℃
 Frequency range:50Hz~60Hz
 Dielectric strength:P1/P2: 600V AC
 S1/S2: 600V AC
 P/S: 4000V AC

Secondary voltage	Secondary no load voltage	Secondary full load current
7V×2	8.3V×2	1785mA
9V×2	10.7V×2	1377mA
12V×2	14.2V×2	1041mA
15V×2	17.8V×2	832mA
18V×2	21.4V×2	694mA
22V×2	26.2V×2	568mA


Electrical data:

Primary voltage	110×2/115×2/120×2	V
Primary voltage range	±10	%
Voltage regulation	≤15	%
Power	25	VA
Temperature rising	≤20	℃
No load loss	<0.5	W
weight	440	g


Schematic Diagram:



Dimension(mm):

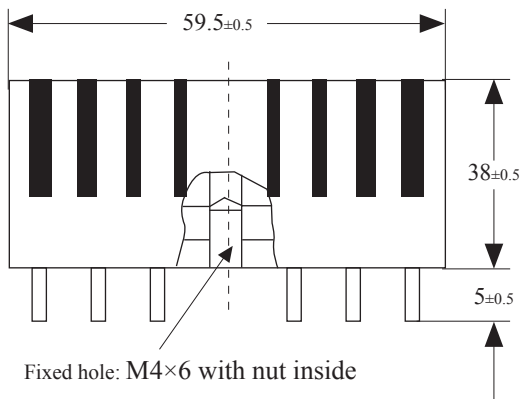

Front View

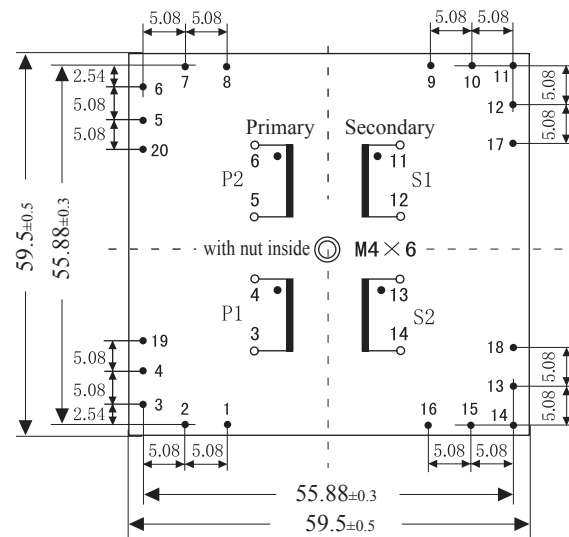

Bottom View