

Model:TA8349-250

Characteristics:

Epoxy resin encapsulated, mini outline size, fully enclosed.

Technical index:

Mounting type: PCB

Material of the core: Nanocrystalline

Flame resistance: UL94-V0

Execution standard: GB1208-2006

Operating temperature: $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Storage temperature: $-45^{\circ}\text{C} \sim +95^{\circ}\text{C}$

Frequency range: 20Hz-20KHz


Dielectric strength: $\geq 3.5\text{KV}$ 50Hz 1min



Electrical parameters:

Rated input	0-40	A
Max.input	150	A
Rated output	0-16	mA
Turns ratio	1: 2500	
Accuracy	± 1	%
Linearity	≤ 0.2	%
Phase difference	$\leq 15'$	
max: Max. sampling resistance	300	Ω
Weight	22.9	g

Pareto diagram of welding needles

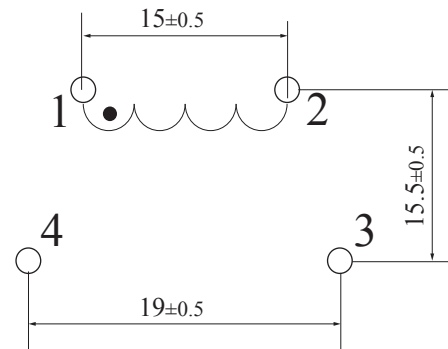

Dimensions (in mm) :

