

Model: SCT023R

Characteristic:

Split core structure, hanging installation, window shape: round, diameter: 23mm. Secondary leading wire output, leads length: 1.5m.




Technical indicators:

Material of core: Silicon steel sheet
 Fire resistance property:UL94-V0
 Work voltage:720V
 Work temperature:-30 ~ +65
 Storage temperature:-40 ~ +85
 Frequency range:50Hz ~ 60Hz
 Dielectric strength:AC 3.5KV/1min


Electric parameter:

Rated input(rms)	400	A
Max.Input	480	A
Rated output	50	mA
Turns ratio	1: 8000	
Accuracy	±0.5	%
Linearity	≤0.5	%
Phase error	≤30'	
max:Sampling resistance	50	Ω
Weight	110	g

Characteristic curve in different load volt-ampere:

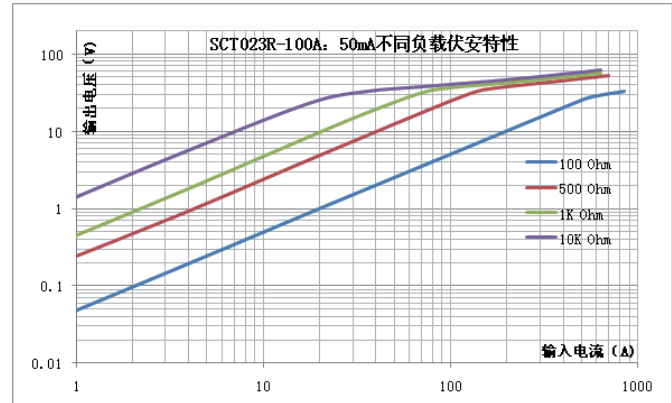

Wiring diagram:

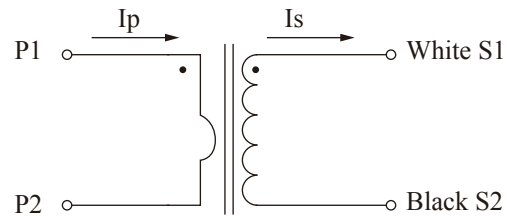

Outline size diagram(in mm):

